### (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

## (19) World Intellectual Property Organization International Bureau





(43) International Publication Date 24 December 2003 (24.12.2003)

**PCT** 

# (10) International Publication Number WO 03/107597 A1

(51) International Patent Classification7:

. .

\_\_\_

(21) International Application Number: PCT/KR03/01175

(22) International Filing Date: 16 June 2

16 June 2003 (16.06.2003)

H04L 12/46

(25) Filing Language:

Korean

(26) Publication Language:

English

(30) Priority Data: 10-2002-0033511

15 June 2002 (15.06.2002) KI


- (71) Applicant (for all designated States except US): LG ELECTRONICS INC. [KR/KR]; 20, Yoido-Dong, Youngdungpo-Gu, Seoul 150-010 (KR).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SON, Jin-Ho [KR/KR]; Jugong Apt. 908-301, 41, Burim-Dong,

Gwacheon, Gyeonggi-Do 427-804 (KR). KANG, Min-Seok [KR/KR]; Dongbucentreville 101-1001, 418, Ichon1-Dong, Yongsan-Gu, Seoul 140-031 (KR).

- (74) Agent: PARK, Jang-Won; Jewoo Bldg. 5th Floor, 200, Nonhyun-Dong, Gangnam-Gu, Seoul 135-010 (KR).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: SYNCHRONIZATION METHOD OF UPnP-BASED HOME NETWORK

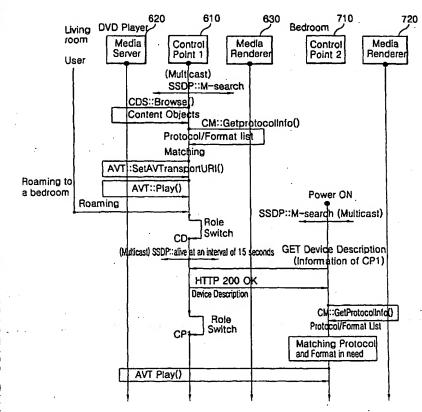

Synchronization (57) Abstract: method of an UPnP (Universal Plug and Play)-based home network is disclosed to automatically transfer information of a CP (Control Point) to a different CP. By switching a role of the CP or generating a virtual UPnP device through the CP, information among plural CPs according to user's roaming can be automatically transferred or exchanged, guaranteeing a continuity of an operation. Thus, time for constructing a system can be reduced and user's convenience is maximized.

WO 03/107597 A1

## WO 03/107597 A1



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

#### Published:

with international search report